









МУФТЫ КУЛАЧКОВЫЕ БЕЗЛЮФТОВЫЕ GS



Материал: Алюминий

Тип	Артикул	Крутящий момент (Нм)				Диаметр отверстия (d)		Размеры ступицы							Зажимные винты			Кол-во кулачков полумуфты
		80 sh-A	92 sh-A	98 sh-A	64 sh-D	min	max	C	D	e (")	F	N	S	L	M	T	Ms	
						мм	мм											
7	GS73/3EMT	1	1,5	2	-	5	6	7	14	8	5	6	1	22	M2,5	3,5	0,3	2
9	GS94/4EMT	2	3	5	5	4	11	10	20	10	7,2	8	1,0	30	M2,5	5	0,76	2
12	GS125/5EMT	3	5	9	12	5	12	11	25	12	8,5	10	1,0	34	M3	5	1,34	2
14	GS145/5EMT	4	8	13	16	5	16	11	30	13	10,5	10	1,5	35	M3	5	1,34	2

(*) монтажные размеры

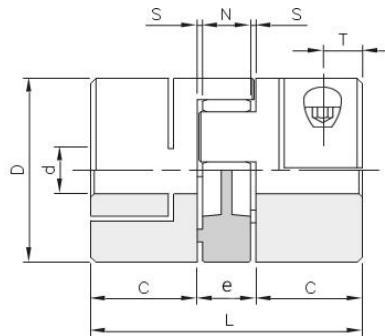

Материал: Алюминий

Тип	Артикул	Крутящий момент (Нм)				Диаметр отверстия (d)		Размеры ступицы							Зажимные винты			Кол-во кулачков полумуфты
		80 sh-A	92 sh-A	98 sh-A	64 sh-D	min	max	C	D	e (1)	F	N	S	L	M	T	Ms	
						мм	мм											
19	GS198/8EMT	5	10	17	21	8	22	25	41	16	18	12	2	66	M6	11	10,5	3
24	GS2410/10EMT	-	35	60	75	10	28	30	56	18	27	14	2	78	M6	10,5	10,5	4
28	GS2812/12EMT	-	95	160	200	12	38	35	66	20	30	15	2,5	90	M8	11,5	25	4
38	GS3815/15EMT	-	190	325	405	15	45	45	80	24	38	18	3	114	M8	15,5	25	4
42	GS4220/20EMT	-	265	450	560	20	50	50	95	26	46	20	3	126	M10	18	69	4
48	GS4825/25EMT	-	310	525	655	25	55	56	105	28	51	21	3,5	140	M12	21	120	4
55	GS5532/32EMT	-	410	685	825	32	65	65	120	30	60	22	4	160	M12	26	120	4
65	GS6535/35EMT	-	-	940	1175	35	70	75	135	35	68	26	4,5	185	M12	33	120	4
75	GS7542/42EMT	-	-	1920	2400	42	80	85	160	40	80	30	5	210	M16	36	295	5
90	GS9042/42EMT	-	-	3600	4500	42	90	100	200	45	104	34	5,5	245	M20	40	580	5

(*) монтажные размеры