




# PULEGGE DENTATE PER CINGHIE HTD®

## HTD® TIMING BELT PULLEYS

### 5M

#### PASSO 5 mm

PER CINGHIE LARGHEZZA 15 mm

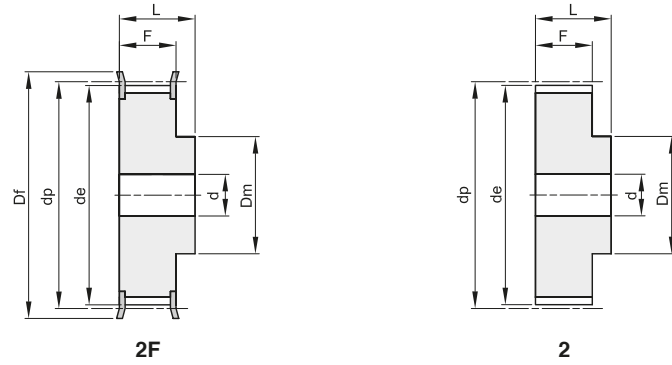

Materiale: Acciaio (St)  
 Materiale: Alluminio UNI 9006 - T6 (Al)  
 adatto per l'ossidazione dura a spessore

| descrizione | codice   | tipo | materiale | denti | dp     | de     | Df | Dm   | Di | F    | L  | d | n° flangia | Kg.  |
|-------------|----------|------|-----------|-------|--------|--------|----|------|----|------|----|---|------------|------|
| 12 5M 15    | 41015012 | 2F   | St        | 12    | 19,10  | 17,96  | 23 | 12,5 |    | 20,5 | 26 | 6 | 202        | 0,03 |
| 14 5M 15    | 41015014 | 2F   | St        | 14    | 22,28  | 21,14  | 25 | 13,5 |    | 20,5 | 26 | 6 | 203        | 0,04 |
| 15 5M 15    | 41015015 | 2F   | St        | 15    | 23,87  | 22,73  | 28 | 16,0 |    | 20,5 | 26 | 6 | 204        | 0,05 |
| 16 5M 15    | 41015016 | 2F   | St        | 16    | 25,46  | 24,32  | 28 | 16,5 |    | 20,5 | 26 | 6 | 204        | 0,06 |
| 18 5M 15    | 41015018 | 2F   | St        | 18    | 28,65  | 27,51  | 32 | 20,0 |    | 20,5 | 26 | 6 | 205        | 0,09 |
| 20 5M 15    | 41015020 | 2F   | St        | 20    | 31,83  | 30,69  | 36 | 23,0 |    | 20,5 | 26 | 6 | 206        | 0,12 |
| 21 5M 15    | 41015021 | 2F   | St        | 21    | 33,42  | 32,28  | 38 | 24,0 |    | 20,5 | 26 | 6 | 207        | 0,14 |
| 22 5M 15    | 41015022 | 2F   | St        | 22    | 35,01  | 33,87  | 38 | 25,5 |    | 20,5 | 26 | 6 | 207        | 0,15 |
| 24 5M 15    | 41015024 | 2F   | St        | 24    | 38,20  | 37,06  | 42 | 27,0 |    | 20,5 | 28 | 6 | 208        | 0,19 |
| 26 5M 15    | 41015026 | 2F   | St        | 26    | 41,38  | 40,24  | 44 | 30,0 |    | 20,5 | 28 | 6 | 209        | 0,23 |
| 28 5M 15    | 41015028 | 2F   | St        | 28    | 44,56  | 43,42  | 48 | 30,5 |    | 20,5 | 28 | 6 | 210        | 0,26 |
| 30 5M 15    | 41015030 | 2F   | St        | 30    | 47,75  | 46,60  | 51 | 35,0 |    | 20,5 | 28 | 6 | 211        | 0,32 |
| 32 5M 15    | 41015032 | 2F   | St        | 32    | 50,93  | 49,79  | 54 | 38,0 |    | 20,5 | 28 | 8 | 212        | 0,35 |
| 36 5M 15    | 41015036 | 2F   | St        | 36    | 57,30  | 56,16  | 60 | 38,0 |    | 20,5 | 28 | 8 | 214        | 0,43 |
| 40 5M 15    | 41015040 | 2F   | St        | 40    | 63,66  | 62,52  | 71 | 38,0 |    | 20,5 | 28 | 8 | 217        | 0,52 |
| 44 5M 15    | 41015044 | 2    | Al        | 44    | 70,03  | 68,89  |    | 38,0 |    | 20,5 | 30 | 8 |            | 0,23 |
| 48 5M 15    | 41015048 | 2    | Al        | 48    | 76,39  | 75,25  |    | 38,0 |    | 20,5 | 30 | 8 |            | 0,29 |
| 60 5M 15    | 41015060 | 2    | Al        | 60    | 95,49  | 94,35  |    | 50,0 |    | 20,5 | 30 | 8 |            | 0,42 |
| 72 5M 15    | 41015072 | 2    | Al        | 72    | 114,59 | 113,45 |    | 50,0 |    | 20,5 | 30 | 8 |            | 0,59 |