




## CATENE A RULLI CON PERNI SPORGENTI - DIN 8187 - ISO 606

### EXTENDED PIN CHAINS - DIN 8187 - ISO 606

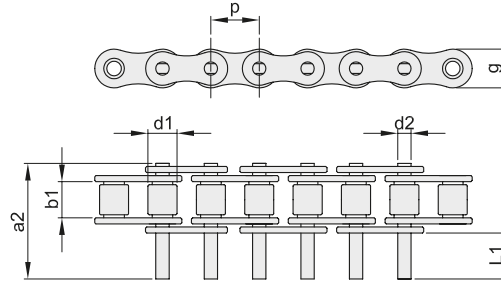

CATENA PRODOTTA DA AZIENDA CERTIFICATA ISO 9001 - ISO 14001 E API 7F  
CHAIN PRODUCED BY ISO 9001 - ISO 14001 AND API 7F CERTIFIED COMPANY

CATENA PRESTIRATA / PRE-STRETCHED CHAINS

CONFEZIONE DA 5 MT




| ISO   | codice    | p      |      | b <sub>1</sub><br>mm<br>min. | d <sub>2</sub><br>mm | d <sub>1</sub><br>mm<br>max. | L <sub>1</sub><br>mm | a <sub>2</sub><br>mm<br>min. | g<br>mm<br>max. | Carico di rottura |             | q<br>kg/m<br>≈ |
|-------|-----------|--------|------|------------------------------|----------------------|------------------------------|----------------------|------------------------------|-----------------|-------------------|-------------|----------------|
|       |           | mm     | inch |                              |                      |                              |                      |                              |                 | minimo<br>KN      | medio<br>KN |                |
| 06B-1 | 605109000 | 9,525  | 3/8" | 5,72                         | 3,28                 | 6,35                         | 11,10                | 22,75                        | 8,26            | 9,0               | 10,7        | 0,47           |
| 08B-1 | 605112000 | 12,7   | 1/2" | 7,75                         | 4,45                 | 8,51                         | 15,15                | 30,91                        | 11,81           | 18,0              | 21,1        | 0,75           |
| 10B-1 | 605115000 | 15,875 | 5/8" | 9,65                         | 5,08                 | 10,16                        | 17,63                | 35,26                        | 14,73           | 22,4              | 27,4        | 1,07           |
| 12B-1 | 605119000 | 19,05  | 3/4" | 11,68                        | 5,72                 | 12,07                        | 20,83                | 41,66                        | 16,13           | 29,0              | 32,3        | 1,22           |
| 16B-1 | 605125000 | 25,4   | 1"   | 17,02                        | 8,28                 | 15,88                        | 33,80                | 67,58                        | 21,08           | 60,0              | 70,6        | 3,03           |



## CATENE PER ACCUMULO

### ACCUMULATOR CHAINS

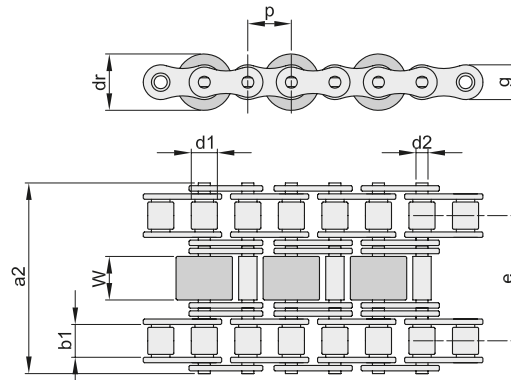

CATENA PRODOTTA DA AZIENDA CERTIFICATA ISO 9001 - ISO 14001 E API 7F  
CHAIN PRODUCED BY ISO 9001 - ISO 14001 AND API 7F CERTIFIED COMPANY

CATENA PRESTIRATA / PRE-STRETCHED CHAINS

CONFEZIONE DA 5 MT



| ISO   | codice    | p     |      | b <sub>1</sub><br>mm<br>min. | d <sub>2</sub><br>mm | d <sub>1</sub><br>mm<br>max. | a <sub>2</sub><br>mm<br>min. | g<br>mm<br>max. | e<br>mm | dr<br>mm<br>max. | W<br>mm | Carico di rottura |             | q<br>kg/m<br>≈ |
|-------|-----------|-------|------|------------------------------|----------------------|------------------------------|------------------------------|-----------------|---------|------------------|---------|-------------------|-------------|----------------|
|       |           | mm    | inch |                              |                      |                              |                              |                 |         |                  |         | minimo<br>KN      | medio<br>KN |                |
| 12B-3 | 602119000 | 19,05 | 3/4" | 11,68                        | 5,72                 | 12,07                        | 61,2                         | 15,82           | 38,92   | 28,0             | 15,5    | 57,8              | 59,3        | 4,04           |